APE
best *for* you



# ARGILLAE NEVE RECT 120X120

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037666** | 120X120 | 9,90 | PC BIA GL |

## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 $N/mm^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | V |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 78 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |


## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R10 |
| Slip resistance (barefeet) | EN 16165-A | B |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

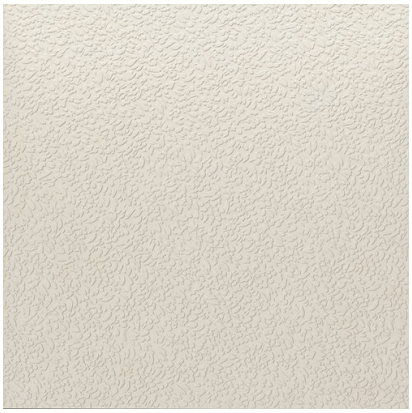

# NISUS NEVE RECT 120X120

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037701** | 120X120 | 10,10 | PC BIA GL |

## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | V |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 79 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you



# COCCIO MIX RECT 120X120

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A038038** | 120X120 | 9,20 | PC BIA GL |

## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | V |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GHA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R10 |
| Slip resistance (barefeet) | EN 16165-A | B |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

# ANTI-SLIP ARGILLAE NEVE RECT 120X120



| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A038230** | 120X120 | 9,30 | PC BIA GL |

## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | V |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 78 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R11 |
| Slip resistance (barefeet) | EN 16165-A | C |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

# ARGILLAE NEVE RECT 60X120

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037672** | 60X120 | 9,80 | PC BIA GL |



## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | V |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 78 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R10 |
| Slip resistance (barefeet) | EN 16165-A | B |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

# NISUS NEVE RECT 60X120

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037707** | 60X120 | 10,00 | PC BIA GL |



## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | V |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 77 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |



This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

# ANTI-SLIP ARGILLAE NEVE RECT 60X120

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A038040** | 60X120 | 9,90 | PC BIA GL |



## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | V |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 78 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R11 |
| Slip resistance (barefeet) | EN 16165-A | C |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you



# ARGILLAE NEVE RECT 60X60

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037681** | 60X60 | 8,80 | PC BIA GL |

## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | V |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 78 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R10 |
| Slip resistance (barefeet) | EN 16165-A | B |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you



# NISUS NEVE RECT 60X60

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037713** | 60X60 | 10,00 | PC BIA GL |

## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | V |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 77 |


## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

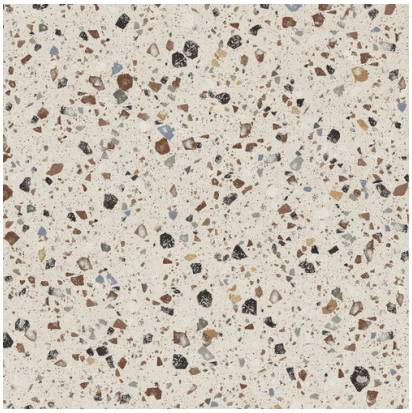

# COCCIO MIX RECT 60X60

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037804** | 60X60 | 8,80 | PC BIA GL |

## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | V |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GHA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R10 |
| Slip resistance (barefeet) | EN 16165-A | B |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

# ANTI-SLIP ARGILLAE NEVE RECT 60X60



| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A038041** | 60X60 | 9,40 | PC BIA GL |

## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | V |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 77 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R11 |
| Slip resistance (barefeet) | EN 16165-A | C |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

# ARGILLAE NEVE RECT 30X60

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037691** | 30X60 | 8,80 | PC BIA GL |



## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | V |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 78 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R10 |
| Slip resistance (barefeet) | EN 16165-A | B |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

# NISUS NEVE RECT 30X60

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037719** | 30X60 | 10,00 | PC BIA GL |



## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | V |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 77 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

# ANTI-SLIP ARGILLAE NEVE RECT 30X60

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A038042** | 30X60 | 9,80 | PC BIA GL |



## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | V |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 78 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R11 |
| Slip resistance (barefeet) | EN 16165-A | C |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you



# COCCIO MIX RECT 30X30

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A038071** | 30X30 | 9,10 | PC BIA GL |

## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | V |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GHA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R10 |
| Slip resistance (barefeet) | EN 16165-A | B |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you



# ARGILLAE FUMO RECT 120X120

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037663** | 120X120 | 9,50 | PC BIA GL |

## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | II |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 36 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R10 |
| Slip resistance (barefeet) | EN 16165-A | B |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you



# NISUS FUMO RECT 120X120

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037698** | 120X120 | 10,40 | PC BIA GL |

## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | II |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 38 |

## CHEMICAL PROPERTIES


| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

# ANTI-SLIP ARGILLAE FUMO RECT 120X120

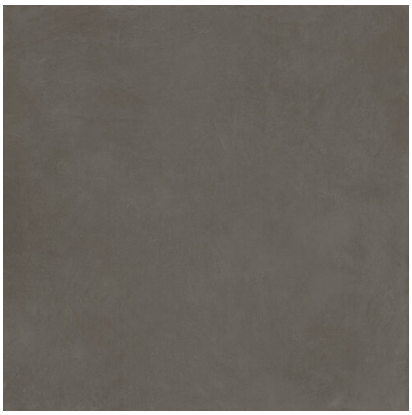

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A038228** | 120X120 | 10,00 | PC BIA GL |

## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | II |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 36 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R11 |
| Slip resistance (barefeet) | EN 16165-A | C |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

# ARGILLAE FUMO RECT 60X120

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037669** | 60X120 | 8,80 | PC BIA GL |



## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | II |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 37 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R10 |
| Slip resistance (barefeet) | EN 16165-A | B |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

# ANTI-SLIP ARGILLAE FUMO RECT 60X120

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037675** | 60X120 | 10,00 | PC BIA GL |



## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | II |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 37 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R11 |
| Slip resistance (barefeet) | EN 16165-A | C |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

# NISUS FUMO RECT 60X120

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037704** | 60X120 | 10,40 | PC BIA GL |



## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | II |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 36 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you



# ARGILLAE FUMO RECT 60X60

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037679** | 60X60 | 8,90 | PC BIA GL |

## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | II |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 37 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R10 |
| Slip resistance (barefeet) | EN 16165-A | B |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you



# ANTI-SLIP ARGILLAE FUMO RECT 60X60

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037684** | 60X60 | 9,90 | PC BIA GL |

## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | II |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 36 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R11 |
| Slip resistance (barefeet) | EN 16165-A | C |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you



# NISUS FUMO RECT 60X60

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037710** | 60X60 | 10,00 | PC BIA GL |

## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | II |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 36 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

# ARGILLAE FUMO RECT 30X60

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037688** | 30X60 | 8,80 | PC BIA GL |



## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | II |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 37 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R10 |
| Slip resistance (barefeet) | EN 16165-A | B |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

# ANTI-SLIP ARGILLAE FUMO RECT 30X60

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037694** | 30X60 | 9,80 | PC BIA GL |



## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | II |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 36 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R11 |
| Slip resistance (barefeet) | EN 16165-A | C |


apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

# NISUS FUMO RECT 30X60

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037716** | 30X60 | 10,40 | PC BIA GL |

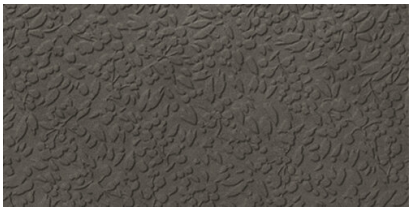

## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | II |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 36 |


## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

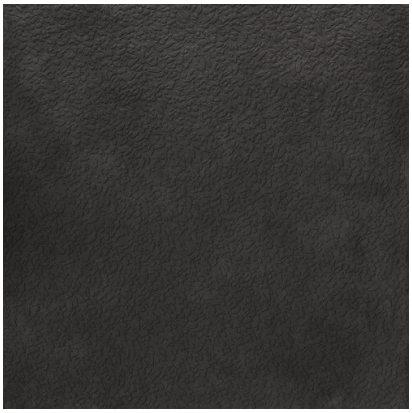

# NISUS NOCTA RECT 120X120

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037700** | 120X120 | 10,40 | PC BIA GL |

## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | I |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 19 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

# ARGILLAE NOCTA RECT 60X120

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037671** | 60X120 | 9,20 | PC BIA GL |



## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | I |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 26 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R10 |
| Slip resistance (barefeet) | EN 16165-A | B |



This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

# NISUS NOCTA RECT 60X120

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037706** | 60X120 | 10,40 | PC BIA GL |



## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | I |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 20 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you



# NISUS NOCTA RECT 60X60

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037712** | 60X60 | 10,30 | PC BIA GL |

## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 $N/mm^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | I |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 20 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you



# ARGILLAE NOCTA RECT 60X60

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A038001** | 60X60 | 9,30 | PC BIA GL |

## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | I |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 17 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R10 |
| Slip resistance (barefeet) | EN 16165-A | B |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

# ARGILLAE NOCTA RECT 30X60

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037690** | 30X60 | 9,60 | PC BIA GL |



## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | I |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 20 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R10 |
| Slip resistance (barefeet) | EN 16165-A | B |



This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

# NISUS NOCTA RECT 30X60

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037718** | 30X60 | 9,80 | PC BIA GL |



## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | I |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 17 |


## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

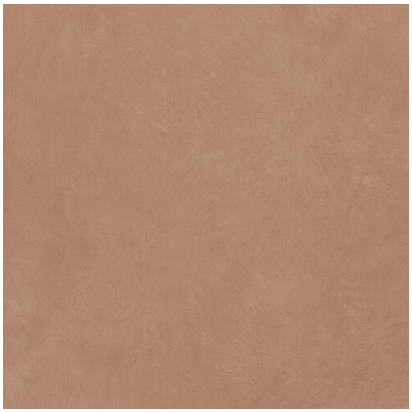

# ARGILLAE GOBI RECT 120X120

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037664** | 120X120 | 9,90 | PC BIA GL |

## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | II |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 56 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R10 |
| Slip resistance (barefeet) | EN 16165-A | B |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you



# NISUS GOBI RECT 120X120

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037699** | 120X120 | 10,00 | PC BIA GL |

## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | II |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 50 |


## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

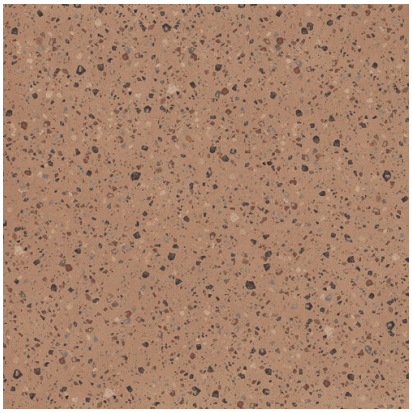

# COCCIO GOBI RECT 120X120

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A038075** | 120X120 | 9,90 | PC BIA GL |

## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | IV |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GHA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

## ANTI-SLIP CHARACTERISTICS


| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R10 |
| Slip resistance (barefeet) | EN 16165-A | B |



This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

# ANTI-SLIP ARGILLAE GOBI RECT 120X120

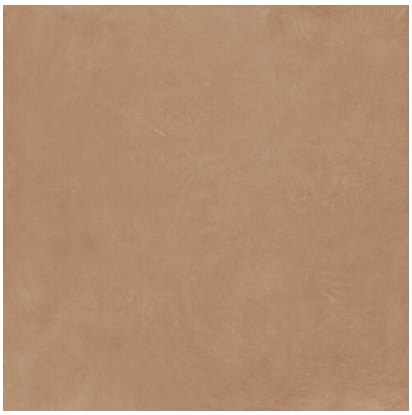

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A038229** | 120X120 | 10,00 | PC BIA GL |

## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | II |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 56 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R11 |
| Slip resistance (barefeet) | EN 16165-A | C |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

# ARGILLAE GOBI RECT 60X120

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037670** | 60X120 | 8,90 | PC BIA GL |



## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | II |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 56 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R10 |
| Slip resistance (barefeet) | EN 16165-A | B |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

# ANTI-SLIP ARGILLAE GOBI RECT 60X120

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037676** | 60X120 | 9,70 | PC BIA GL |



## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | II |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 56 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R11 |
| Slip resistance (barefeet) | EN 16165-A | C |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

# NISUS GOBI RECT 60X120

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037705** | 60X120 | 10,10 | PC BIA GL |



## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | II |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 48 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you



# ARGILLAE GOBI RECT 60X60

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037680** | 60X60 | 9,10 | PC BIA GL |

## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | II |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 56 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R10 |
| Slip resistance (barefeet) | EN 16165-A | B |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you



# ANTI-SLIP ARGILLAE GOBI RECT 60X60

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037685** | 60X60 | 9,60 | PC BIA GL |

## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | II |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 56 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R11 |
| Slip resistance (barefeet) | EN 16165-A | C |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you



# NISUS GOBI RECT 60X60

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037711** | 60X60 | 9,90 | PC BIA GL |

## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | II |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 52 |


## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

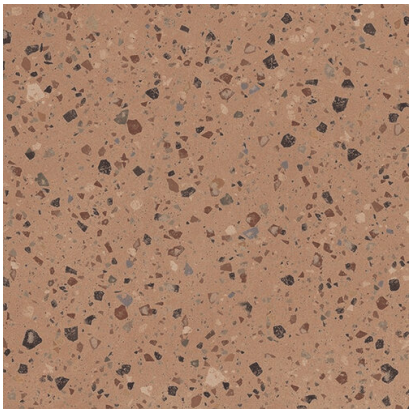

# COCCIO GOBI RECT 60X60

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037806** | 60X60 | 9,30 | PC BIA GL |

## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | IV |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GHA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R10 |
| Slip resistance (barefeet) | EN 16165-A | B |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

# ARGILLAE GOBI RECT 30X60

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037689** | 30X60 | 8,90 | PC BIA GL |



## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | II |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 56 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R10 |
| Slip resistance (barefeet) | EN 16165-A | B |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

# ANTI-SLIP ARGILLAE GOBI RECT 30X60

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037695** | 30X60 | 9,90 | PC BIA GL |



## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | II |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 56 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R11 |
| Slip resistance (barefeet) | EN 16165-A | C |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

# NISUS GOBI RECT 30X60

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037717** | 30X60 | 9,40 | PC BIA GL |



## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | II |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 52 |


## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |



This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

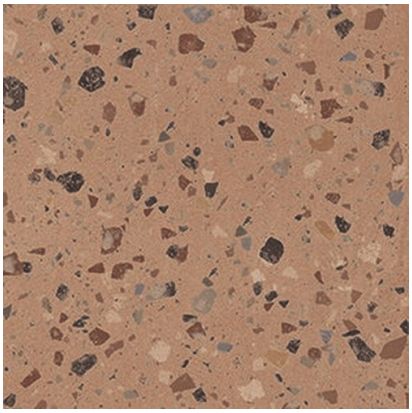

# COCCIO GOBI RECT 30X30

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A038074** | 30X30 | 9,80 | PC BIA GL |

## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | IV |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GHA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |


## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R10 |
| Slip resistance (barefeet) | EN 16165-A | B |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

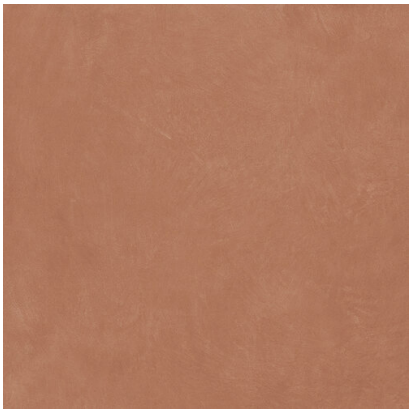

# ARGILLAE CORAL RECT 120X120

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037662** | 120X120 | 9,90 | PC BIA GL |

## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | II |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 51 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |


## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R10 |
| Slip resistance (barefeet) | EN 16165-A | B |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

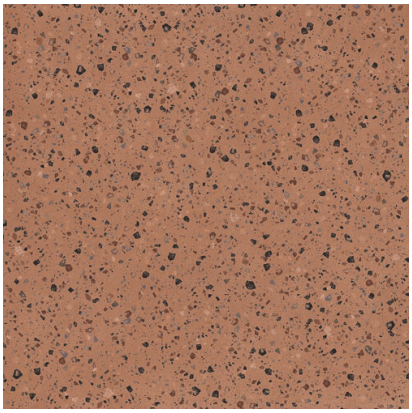

# COCCIO CORAL RECT 120X120

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A038070** | 120X120 | 9,90 | PC BIA GL |

## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | IV |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GHA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

## ANTI-SLIP CHARACTERISTICS


| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R10 |
| Slip resistance (barefeet) | EN 16165-A | B |



This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

# ANTI-SLIP ARGILLAE CORAL RECT 120X120

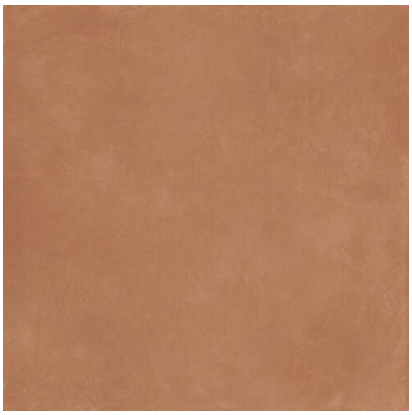

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A038227** | 120X120 | 10,00 | PC BIA GL |

## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | II |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 51 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R11 |
| Slip resistance (barefeet) | EN 16165-A | C |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

# ARGILLAE CORAL RECT 60X120

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037668** | 60X120 | 9,40 | PC BIA GL |



## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | II |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 51 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R10 |
| Slip resistance (barefeet) | EN 16165-A | B |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

# ANTI-SLIP ARGILLAE CORAL RECT 60X120

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037674** | 60X120 | 10,10 | PC BIA GL |



## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | II |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 51 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R11 |
| Slip resistance (barefeet) | EN 16165-A | C |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you



# ARGILLAE CORAL RECT 60X60

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037678** | 60X60 | 9,30 | PC BIA GL |

## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | II |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 51 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |


## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R10 |
| Slip resistance (barefeet) | EN 16165-A | B |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

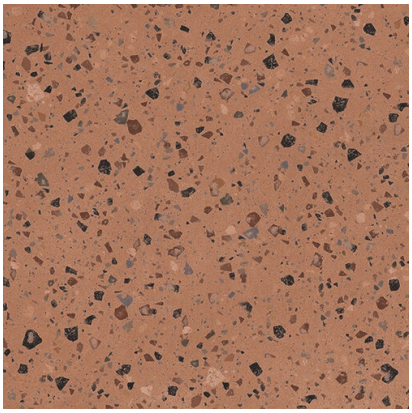

# COCCIO CORAL RECT 60X60

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037805** | 60X60 | 9,80 | PC BIA GL |

## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | IV |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GHA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R10 |
| Slip resistance (barefeet) | EN 16165-A | B |



This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

# ANTI-SLIP ARGILLAE CORAL RECT 60X60



| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037683** | 60X60 | 8,90 | PC BIA GL |

## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | II |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 44 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R11 |
| Slip resistance (barefeet) | EN 16165-A | C |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

# ARGILLAE CORAL RECT 30X60

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037687** | 30X60 | 8,80 | PC BIA GL |



## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | II |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 56 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R10 |
| Slip resistance (barefeet) | EN 16165-A | B |



This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

# ANTI-SLIP ARGILLAE CORAL RECT 30X60

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037693** | 30X60 | 8,80 | PC BIA GL |



## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | II |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 51 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |


## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R11 |
| Slip resistance (barefeet) | EN 16165-A | C |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

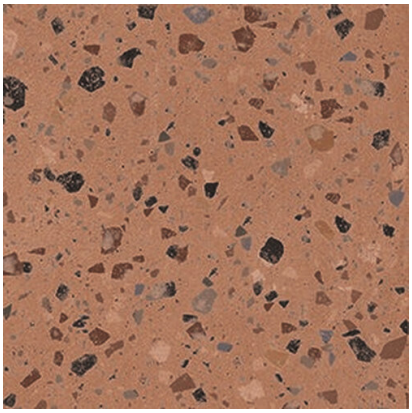

# COCCIO CORAL RECT 30X30

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A038073** | 30X30 | 9,50 | PC BIA GL |

## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 $N/mm^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | IV |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GHA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |


## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R10 |
| Slip resistance (barefeet) | EN 16165-A | B |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

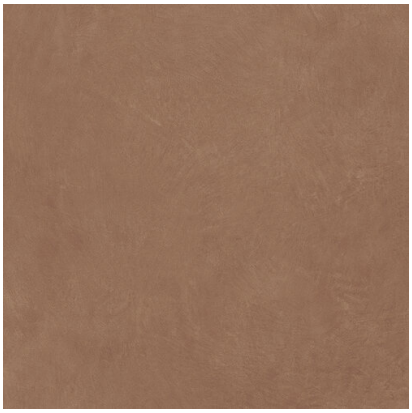

# ARGILLAE TERRA RECT 120X120

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037661** | 120X120 | 10,40 | PC BIA GL |

## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | II |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 44 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R10 |
| Slip resistance (barefeet) | EN 16165-A | B |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you



# NISUS TERRA RECT 120X120

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037696** | 120X120 | 10,00 | PC BIA GL |

## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 $N/mm^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | II |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 40 |


## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

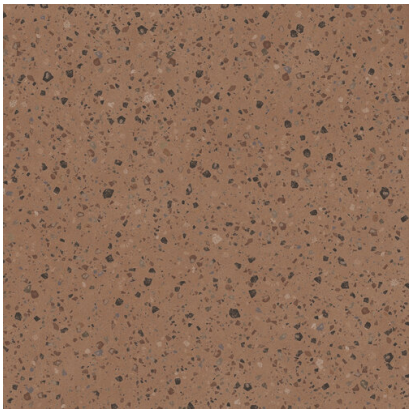

# COCCIO TERRA RECT 120X120

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A038037** | 120X120 | 9,10 | PC BIA GL |

## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 $N/mm^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | IV |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GHA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |


## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R10 |
| Slip resistance (barefeet) | EN 16165-A | B |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

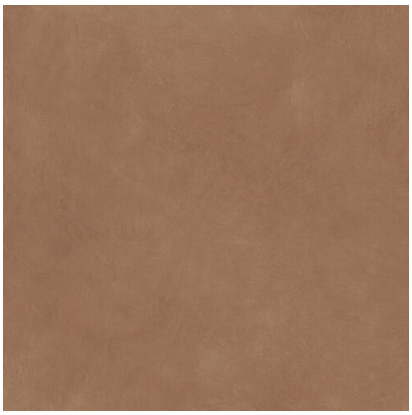

# ANTI-SLIP ARGILLAE TERRA RECT 120X120

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A038226** | 120X120 | 9,30 | PC BIA GL |

## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | III |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 43 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 1 |

## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R11 |
| Slip resistance (barefeet) | EN 16165-A | C |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

# ARGILLAE TERRA RECT 60X120

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037667** | 60X120 | 9,40 | PC BIA GL |



## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | II |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 44 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R10 |
| Slip resistance (barefeet) | EN 16165-A | B |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

# ANTI-SLIP ARGILLAE TERRA RECT 60X120

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037673** | 60X120 | 9,80 | PC BIA GL |



## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | III |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 43 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R11 |
| Slip resistance (barefeet) | EN 16165-A | C |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

# NISUS TERRA RECT 60X120

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037702** | 60X120 | 10,40 | PC BIA GL |



## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | II |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 39 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you



# ARGILLAE TERRA RECT 60X60

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037677** | 60X60 | 9,40 | PC BIA GL |

## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | II |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 44 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

## ANTI-SLIP CHARACTERISTICS


| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R10 |
| Slip resistance (barefeet) | EN 16165-A | B |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

# ANTI-SLIP ARGILLAE TERRA RECT 60X60

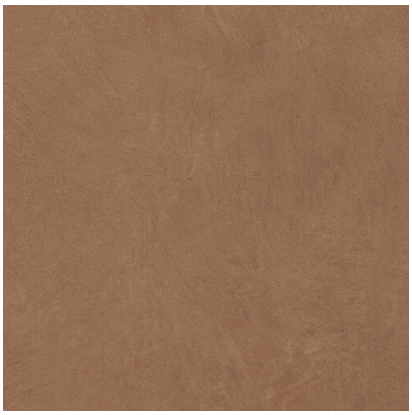

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037682** | 60X60 | 9,10 | PC BIA GL |

## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | III |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 44 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R11 |
| Slip resistance (barefeet) | EN 16165-A | C |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you



# NISUS TERRA RECT 60X60

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037708** | 60X60 | 10,40 | PC BIA GL |

## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | II |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 39 |


## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

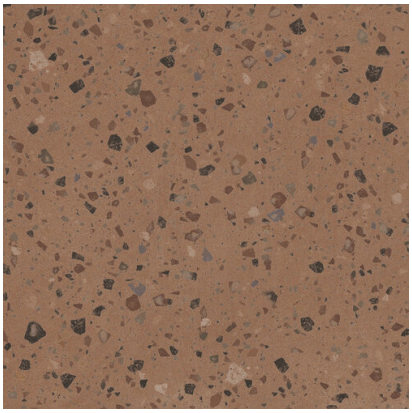

# COCCIO TERRA RECT 60X60

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037807** | 60X60 | 9,40 | PC BIA GL |

## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | IV |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GHA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R10 |
| Slip resistance (barefeet) | EN 16165-A | B |



This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

# ARGILLAE TERRA RECT 30X60

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037686** | 30X60 | 9,00 | PC BIA GL |



## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | II |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 44 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R10 |
| Slip resistance (barefeet) | EN 16165-A | B |


apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

# ANTI-SLIP ARGILLAE TERRA RECT 30X60

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037692** | 30X60 | 8,90 | PC BIA GL |

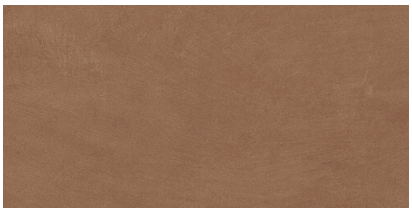

## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | III |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 44 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 1 |

## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R11 |
| Slip resistance (barefeet) | EN 16165-A | C |


apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

# NISUS TERRA RECT 30X60

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037714** | 30X60 | 10,40 | PC BIA GL |

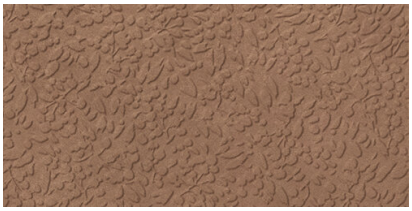

## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | II |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 44 |


## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

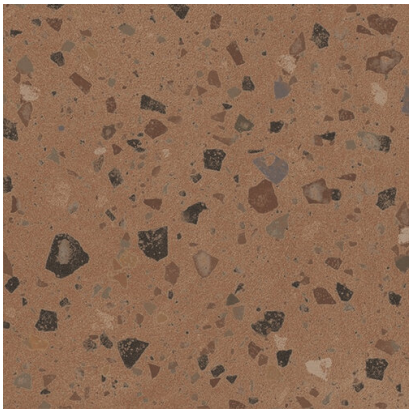

# COCCIO TERRA RECT 30X30

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A038072** | 30X30 | 9,90 | PC BIA GL |

## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | < 0,5% |
| Flexion resistance | EN ISO 10545-04 | => 35 N/mm$^2$ |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07 | IV |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GLA |
| Resistance to alcalis | EN ISO 10545-13 | GHA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

## ANTI-SLIP CHARACTERISTICS

| | | |
|---|---|---|
| Slip resistance (R) | EN 16165-B | R10 |
| Slip resistance (barefeet) | EN 16165-A | B |



This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

CARMEN
true tiles

# MURUS NIX 7X28

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037819** | 7X28 | 8,20 | PC BIB |



## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | 0,5%< E< 3% |
| Flexion resistance | EN ISO 10545-04 | => 49 N/mm$^2$ |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 80 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GHA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

CARMEN
true tiles

# MURUS NOCTA 7X28

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037820** | 7X28 | 8,30 | PC BIB |



## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | 0,5%< E< 3% |
| Flexion resistance | EN ISO 10545-04 | => 49 N/mm$^2$ |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 31 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GHA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |



This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

CARMEN
true tiles

# MURUS TERRA 7X28

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037821** | 7X28 | 8,10 | PC BIB |



## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | 0,5%< E< 3% |
| Flexion resistance | EN ISO 10545-04 | => 49 N/mm$^2$ |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 50 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GHA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |



This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

CARMEN
true tiles

# MURUS VIRIDI 7X28

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037822** | 7X28 | 8,10 | PC BIB |



## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | 0,5%< E< 3% |
| Flexion resistance | EN ISO 10545-04 | => 49 N/mm$^2$ |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GHA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

CARMEN
true tiles

# MURUS OCEANUM 7X28

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A037823** | 7X28 | 8,20 | PC BIB |



## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | 0,5%< E< 3% |
| Flexion resistance | EN ISO 10545-04 | => 49 N/mm$^2$ |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 29 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GHA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |



This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

CARMEN
true tiles

# MURUS GRISEO 7X28

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP |
|---|---|---|---|
| **A038039** | 7X28 | 8,40 | PC BIB |



## DIMENSIONS AND SURFACE PROPERTIES

| | | |
|---|---|---|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |

## PHYSICAL PROPERTIES

| | | |
|---|---|---|
| Water absorption capacity | EN ISO 10545-03 | 0,5%< E< 3% |
| Flexion resistance | EN ISO 10545-04 | => 49 N/mm$^2$ |
| Thermal shock resistance | EN ISO 10545-09 | It stands the test |
| Cracking resistance | EN ISO 10545-11 | It stands the test |
| Frost resistance | EN ISO 10545-12 | It stands the test |
| Light Reflectance Value (LRV) | | 54 |

## CHEMICAL PROPERTIES

| | | |
|---|---|---|
| Resistance to acids | EN ISO 10545-13 | GHA |
| Resistance to alcalis | EN ISO 10545-13 | GLA |
| Resistance to cleaning products | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance | EN ISO 10545-14 | 5 |



This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.