APE
best *for* you



BURLINGTON PEARL RECT 120X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A043681	120X120	9,20	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test
Light Reflectance Value (LRV)		76

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (barefeet)	EN 16165-A	B

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

ANTI-SLIP BURLINGTON PEARL RECT 120X120



REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A043683	120X120	9,10	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test
Light Reflectance Value (LRV)		69

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	C

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

BURLINGTON PEARL RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037729	60X120	9,20	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test
Light Reflectance Value (LRV)		75

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (barefeet)	EN 16165-A	B

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

ANTI-SLIP BURLINGTON PEARL

RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037730	60X120	9,00	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test
Light Reflectance Value (LRV)		70

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	C

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you



BURLINGTON PEARL RECT 75X75

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037738	75X75	9,20	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test
Light Reflectance Value (LRV)		75

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (barefeet)	EN 16165-A	B

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

ANTI-SLIP BURLINGTON PEARL RECT 75X75



REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037739	75X75	8,80	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test
Light Reflectance Value (LRV)		66

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5


ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	C

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

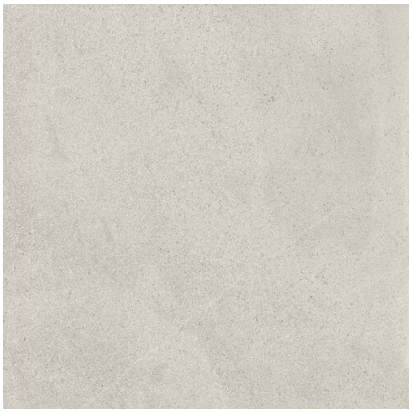

BURLINGTON PEARL RECT 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037720	60X60	8,40	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (barefeet)	EN 16165-A	B

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

BURLINGTON PEARL RECT 30X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038205	30X60	8,30	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test
Light Reflectance Value (LRV)		75

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (barefeet)	EN 16165-A	B

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

PELDAÑO RECTO ANT. C3
BURLINGTON PEARL 33X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038135	33X120	32,40	EXTRUSI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 30 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	C

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

TABICA BURLINGTON PEARL 15X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038998	15X120	9,00	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

BURLINGTON PEARL RECT 30X90

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037893	30X90	8,30	REVESTI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=>12 N/mm^2
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	Not pass the test
Light Reflectance Value (LRV)		78

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

EDEN PEARL RECT 30X90

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037907	30X90	10,20	REVESTI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=>12 N/mm^2
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	Not pass the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

DECOR BURLINGTON PEARL 30X90

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037883	30X90	9,50	REVESTI



DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	Not pass the test

CHEMICAL PROPERTIES

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

DECOR DURHAM I PEARL 30X90

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037876	30X90	9,10	REVESTI



DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	Not pass the test

CHEMICAL PROPERTIES

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

DECOR DURHAM II PEARL 30X90

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038043	30X90	9,10	REVESTI



DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	Not pass the test

CHEMICAL PROPERTIES

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

DECOR DURHAM III PEARL 30X90

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038044	30X90	9,10	REVESTI



DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	Not pass the test

CHEMICAL PROPERTIES

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you



BURLINGTON IVORY RECT 120X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A043680	120X120	9,40	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test
Light Reflectance Value (LRV)		76

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (barefeet)	EN 16165-A	B

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

ANTI-SLIP BURLINGTON IVORY RECT 120X120



REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A043682	120X120	9,20	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test
Light Reflectance Value (LRV)		69

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	C

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

BURLINGTON IVORY RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037733	60X120	9,00	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test
Light Reflectance Value (LRV)		77

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (barefeet)	EN 16165-A	B

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

ANTI-SLIP BURLINGTON IVORY RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037734	60X120	8,80	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test
Light Reflectance Value (LRV)		71

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	C

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you



BURLINGTON IVORY RECT 75X75

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037742	75X75	9,10	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test
Light Reflectance Value (LRV)		74

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (barefeet)	EN 16165-A	B

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you



ANTI-SLIP BURLINGTON IVORY RECT 75X75

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037743	75X75	9,10	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test
Light Reflectance Value (LRV)		70

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5


ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	C

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

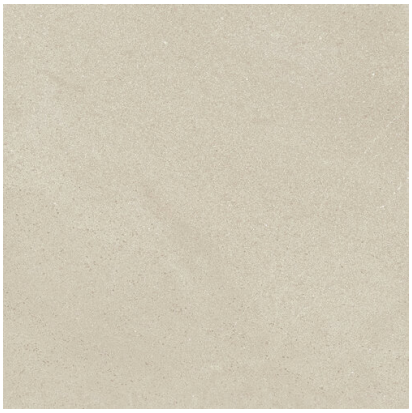

BURLINGTON IVORY RECT 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037724	60X60	8,80	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test
Light Reflectance Value (LRV)		70

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (barefeet)	EN 16165-A	B

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

BURLINGTON IVORY RECT 30X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038207	30X60	8,40	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test
Light Reflectance Value (LRV)		70

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (barefeet)	EN 16165-A	B

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

PELDAÑO RECTO ANT. C3
BURLINGTON IVORY 33X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038134	33X120	34,20	EXTRUSI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 30 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	C

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

TABICA BURLINGTON IVORY 15X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A039415	15X120	9,50	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

BURLINGTON IVORY RECT 30X90

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037895	30X90	8,40	REVESTI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=>12 N/mm^2
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	Not pass the test
Light Reflectance Value (LRV)		78

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

DECOR BURLINGTON IVORY 30X90

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037885	30X90	9,50	REVESTI



DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	Not pass the test

CHEMICAL PROPERTIES

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

DECOR DURHAM I IVORY 30X90

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037877	30X90	9,70	REVESTI



DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	Not pass the test

CHEMICAL PROPERTIES

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

DECOR DURHAM II IVORY 30X90

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038045	30X90	9,60	REVESTI



DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	Not pass the test

CHEMICAL PROPERTIES

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

DECOR DURHAM III IVORY 30X90

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038046	30X90	9,60	REVESTI



DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	Not pass the test

CHEMICAL PROPERTIES

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

BURLINGTON GREY RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037731	60X120	8,90	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test
Light Reflectance Value (LRV)		63

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (barefeet)	EN 16165-A	B

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

ANTI-SLIP BURLINGTON GREY RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037732	60X120	8,70	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test
Light Reflectance Value (LRV)		63

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	C

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you



BURLINGTON GREY RECT 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037722	60X60	8,70	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test
Light Reflectance Value (LRV)		63

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (barefeet)	EN 16165-A	B


apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

BURLINGTON GREY RECT 30X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038206	30X60	8,90	PC BIA GL

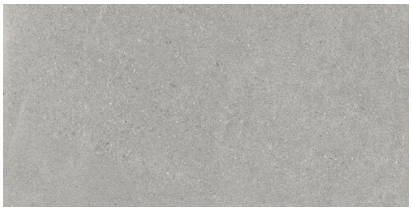

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test
Light Reflectance Value (LRV)		66

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (barefeet)	EN 16165-A	B

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

PELDAÑO RECTO ANT. C3
BURLINGTON GREY 33X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038133	33X120	32,00	EXTRUSI



DIMENSIONS AND SURFACE PROPERTIES		
Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES		
Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 30 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES		
Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS		
Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	C

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

BURLINGTON GREY RECT 30X90

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037894	30X90	8,70	REVESTI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=>12 N/mm^2
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	Not pass the test
Light Reflectance Value (LRV)		72

CHEMICAL PROPERTIES


Resistance to acids	EN ISO 10545-13	GLB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

EDEN GREY RECT 30X90

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037908	30X90	10,90	REVESTI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=>12 N/mm^2
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	Not pass the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

BURLINGTON VOLCANO RECT

60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037737	60X120	9,00	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	II
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test
Light Reflectance Value (LRV)		36.14

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (barefeet)	EN 16165-A	B

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

ANTI-SLIP BURLINGTON VOLCANO RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038131	60X120	8,90	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	II
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test
Light Reflectance Value (LRV)		28

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	C

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

BURLINGTON VOLCANO RECT 60X60



REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037728	60X60	8,90	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	II
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test
Light Reflectance Value (LRV)		28

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (barefeet)	EN 16165-A	B

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

PELDAÑO RECTO ANT. C3
BURLINGTON VOLCANO 33X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038137	33X120	31,80	EXTRUSI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 30 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	C

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

CUMBRIAN VOLCANO RECT 30X90

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037882	30X90	10,40	REVESTI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=>12 N/mm^2
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	Not pass the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

BURLINGTON TAUPE RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037735	60X120	8,80	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test
Light Reflectance Value (LRV)		54

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (barefeet)	EN 16165-A	B

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

ANTI-SLIP BURLINGTON TAUPE RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037736	60X120	8,90	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test
Light Reflectance Value (LRV)		54

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	C

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you



BURLINGTON TAUPE RECT 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037726	60X60	9,70	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test
Light Reflectance Value (LRV)		54

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (barefeet)	EN 16165-A	B

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

BURLINGTON TAUPE RECT 30X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038208	30X60	8,40	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test
Light Reflectance Value (LRV)		54

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (barefeet)	EN 16165-A	B

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

PELDAÑO RECTO ANT. C3
BURLINGTON TAUPE 33X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038136	33X120	32,00	EXTRUSI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 30 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	C

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

CUMBRIAN TAUPE RECT 30X90

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037881	30X90	10,40	REVESTI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=>12 N/mm^2
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	Not pass the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.