


CLICK WHITE RECT. 40X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A032224	40X120	11,00	Wall Tile



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES


Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=> 20 N/mm ²
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

CLICK DAKAR RECT. 40X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A032225	40X120	11,00	Wall Tile



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality UNE-EN 14411 It accomplished all requirements

PHYSICAL PROPERTIES


Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=> 20 N/mm ²
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

CLICK MIST RECT. 40X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A032226	40X120	11,00	Wall Tile



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality UNE-EN 14411 It accomplished all requirements

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=> 20 N/mm ²
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

NET WHITE RECT. 40X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A032227	40X120	11,00	Wall Tile



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=> 20 N/mm ²
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

NET DAKAR RECT. 40X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A032228	40X120	11,00	Wall Tile



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES


Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=> 20 N/mm ²
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

NET MIST RECT. 40X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A032229	40X120	11,00	Wall Tile



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES


Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=> 20 N/mm ²
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ZEEP WHITE RECT. 40X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A032230	40X120	11,00	Wall Tile

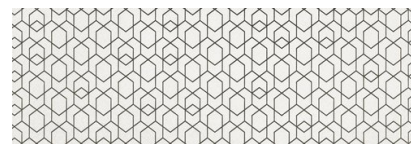

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=> 20 N/mm ²
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ZEEP DAKAR RECT. 40X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A032231	40X120	11,00	Wall Tile



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality UNE-EN 14411 It accomplished all requirements

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=> 20 N/mm ²
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ZEEP MIST RECT. 40X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A032232	40X120	11,00	Wall Tile



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=> 20 N/mm ²
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5