

PUMICE MATT RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037946	60x120	9,00	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES


Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GHB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GHB
Stains resistance	EN ISO 10545-14	5

TAPESTRY PUMICE RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037941	60x120	9,00	PC BIA GL

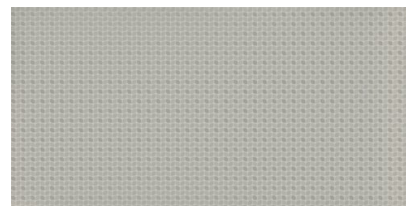

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GHB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GHB
Stains resistance	EN ISO 10545-14	5

DEDALUS POL RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037622	60x120	10,60	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES


Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	II
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

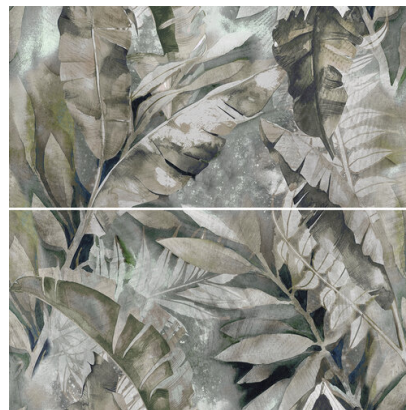

DECOR SET(2) WINTER 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037937	60x120	10,60	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

TERRACOTTA MATT RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037947	60x120	8,90	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES


Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GHB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GHB
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	0.00
----------------------	----------------	------

TAPESTRY TERRACOTTA RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037940	60x120	10,00	PC BIA GL

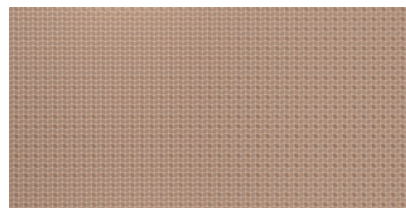

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES


Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GHB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GHB
Stains resistance	EN ISO 10545-14	5

FIOR DI PESCO POL RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037933	60x120	10,50	PC BIA GL

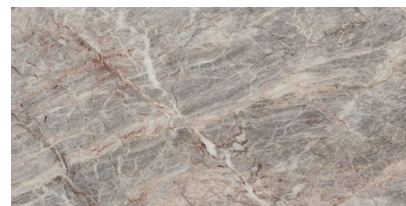

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5



DECOR SET(2) SUMMER 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037935	60x120	10,70	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

SAP MATT RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037945	60x120	9,40	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES


Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GHB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GHB
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	0.00
----------------------	----------------	------

TAPESTRY SAP RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037942	60x120	9,00	PC BIA GL

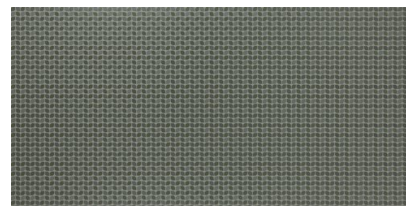

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GHB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GHB
Stains resistance	EN ISO 10545-14	5

JADORE POL RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037623	60x120	10,40	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	II
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5



DECOR SET(2) SPRING 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037938	60x120	10,60	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

WOAD MATT RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037944	60x120	9,00	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES


Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	II
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GHB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GHB
Stains resistance	EN ISO 10545-14	5

TAPESTRY WOAD RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037943	60x120	10,20	PC BIA GL

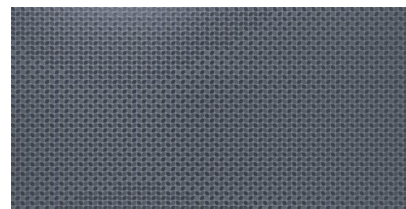

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	II
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GHB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GHB
Stains resistance	EN ISO 10545-14	5

BLUE EXPLOSION POL RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037934	60x120	10,50	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	II
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5



DECOR SET(2) AUTUMN 60X120


REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037939	60x120	9,50	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

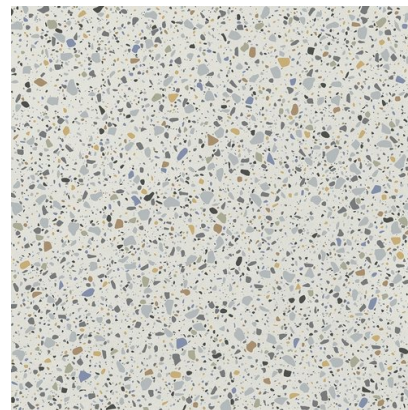

EPOCA WHITE SILKEN RECT 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037920	60X60	8,60	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GHB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GHB
Stains resistance	EN ISO 10545-14	5



EPOCA BONE SILKEN RECT 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037921	60X60	8,50	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES


Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GHB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GHB
Stains resistance	EN ISO 10545-14	5

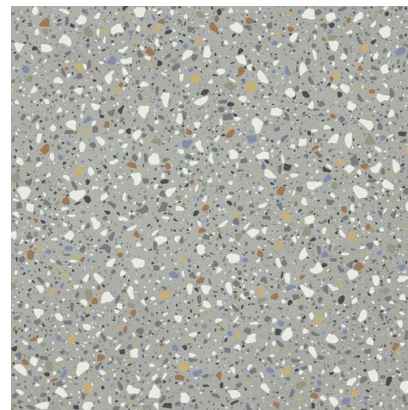

EPOCA GREY SILKEN RECT 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037922	60X60	9,00	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES


Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GHB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GHB
Stains resistance	EN ISO 10545-14	5

LAVABO NISO IZQ.

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040865		0,00	PC BIA GL

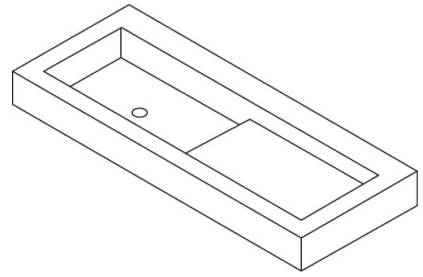

DIMENSIONS AND SURFACE PROPERTIES


PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

LAVABO NISO DCHA.

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040866		0,00	PC BIA GL

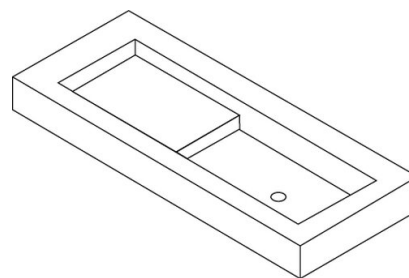

DIMENSIONS AND SURFACE PROPERTIES


PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

LAVABO DE PIE ROMA

Table with 4 columns: REFERENCE, SIZE (cm), THICKNESS (mm), GROUP. Row 1: A040867, 0,00, PC BIA GL

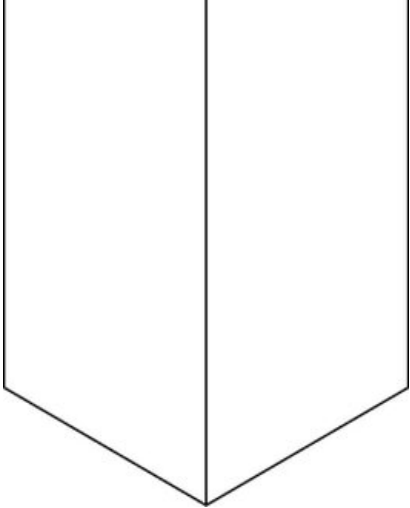

DIMENSIONS AND SURFACE PROPERTIES


PHYSICAL PROPERTIES

Table with 3 columns: Frost resistance, EN ISO 10545-12, It stands the test

CHEMICAL PROPERTIES

LAVABO AXEL IZQ.

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040868		0,00	PC BIA GL

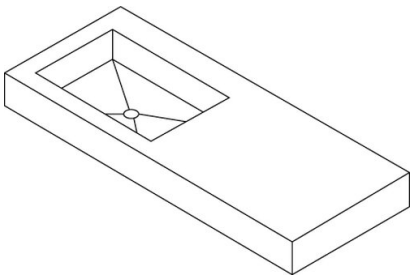

DIMENSIONS AND SURFACE PROPERTIES


PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

LAVABO AXEL DCHA.

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040869		0,00	PC BIA GL

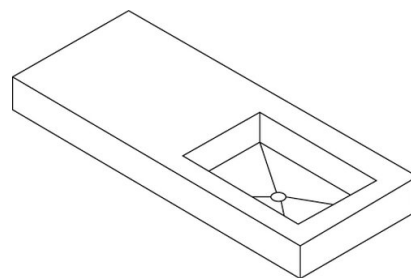

DIMENSIONS AND SURFACE PROPERTIES


PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

LAVABO AXEL CEN.

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040870		0,00	PC BIA GL

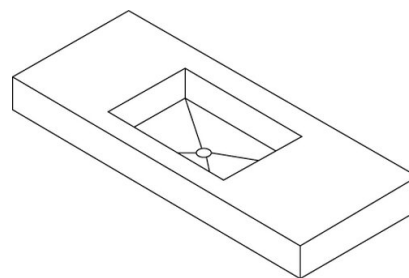

DIMENSIONS AND SURFACE PROPERTIES


PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

LAVABO AXEL DOBLE 160

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040871		0,00	PC BIA GL

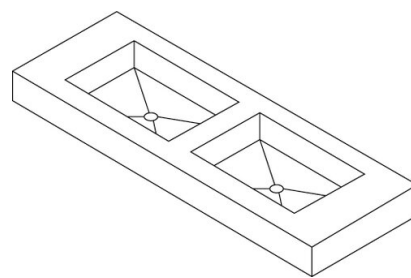

DIMENSIONS AND SURFACE PROPERTIES


PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

LAVABO ENEA IZQ.

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040872		0,00	PC BIA GL

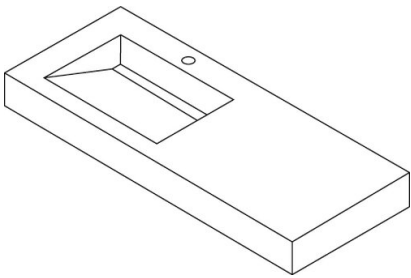

DIMENSIONS AND SURFACE PROPERTIES


PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

LAVABO ENEA DCHA.

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040873		0,00	PC BIA GL

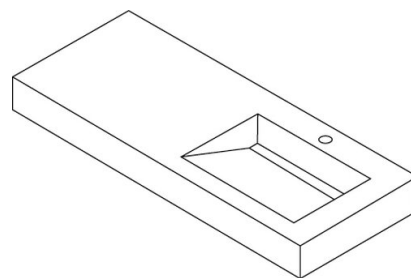

DIMENSIONS AND SURFACE PROPERTIES


PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

LAVABO ENEA CEN.

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040874		0,00	PC BIA GL

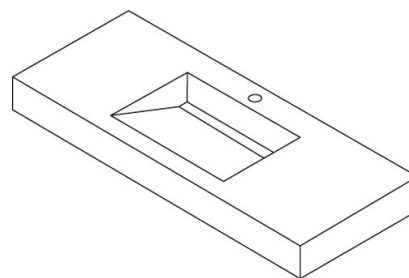

DIMENSIONS AND SURFACE PROPERTIES


PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

LAVABO ENEA DOBLE 160

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040875		0,00	PC BIA GL

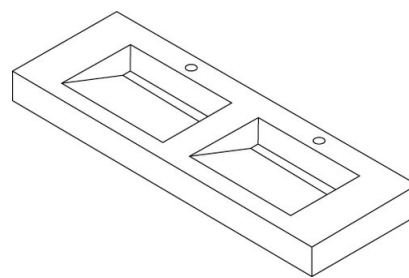

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES