

KLEN COCONUT MILK 25X75

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A036840	25X75	8,90	REVESTI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES


Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=>12 N/mm ²
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	Not pass the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

GAMY COCONUT MILK 25X75

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A036846	25X75	9,20	REVESTI



DIMENSIONS AND SURFACE PROPERTIES


Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=>12 N/mm ²
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	Not pass the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

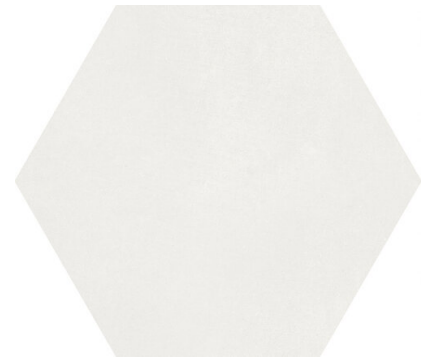

MACBA COCONUT MILK 23X26

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037097	23X26	8,60	PC BIB

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0,5% < E < 3%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	0.00

CHEMICAL PROPERTIES


Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (DCOF)	ANSI A326.3	0.74

SUNNY COCONUT MILK 23X26

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037105	23X26	8,30	PC BIB

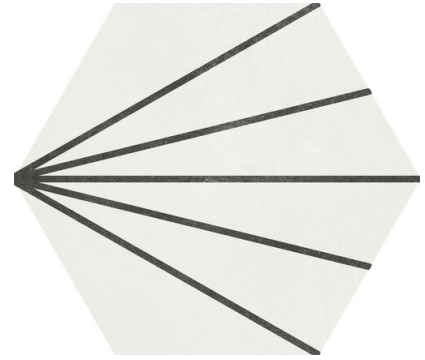

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0,5% < E < 3%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	0.00

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	0.74

LIN COCONUT MILK 25X75

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A036852	25X75	9,60	REVESTI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES


Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=>12 N/mm ²
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	Not pass the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ORION COCONUT MILK 25X75

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037159	25X75	9,10	REVESTI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES


Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=>12 N/mm ²
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	Not pass the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

DECOR SET (3) MAY COCONUT MILK 25X75

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A036903	25X75	9,00	REVESTI

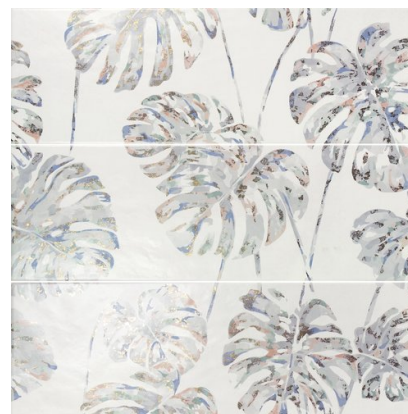

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	Not pass the test
------------------	-----------------	-------------------

CHEMICAL PROPERTIES



KLEN PEARL 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A036858	60X60	8,90	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
----------------------	----------------	---------

SERENISSIMA PEARL RECT 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A036860	60X60	9,50	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
----------------------	----------------	---------

ROD. KLEN PEARL 7,5X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP	
A037394	7,5x60	8,80	PC BIA GL	

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	0.00
---	--------------	------

PHYSICAL PROPERTIES

Thermal shock resistance	EN ISO 10545-09	0.00
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Stains resistance	EN ISO 10545-14	0.00
-------------------	-----------------	------

KLEN PEARL 25X75

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A036841	25X75	9,00	REVESTI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=>12 N/mm ²
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	Not pass the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

GAMY PEARL 25X75

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A036847	25X75	9,60	REVESTI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=>12 N/mm ²
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	Not pass the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

LIN PEARL 25X75

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A036853	25X75	9,60	REVESTI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES


Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=>12 N/mm ²
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	Not pass the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

MACBA PEARL 23X26

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037101	23X26	8,90	PC BIB

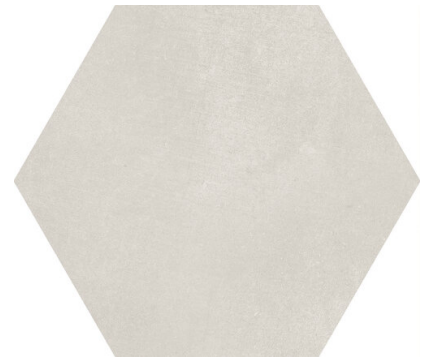

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES


Water absorption capacity	EN ISO 10545-03	0,5% < E < 3%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	0.00

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (DCOF)	ANSI A326.3	0.74

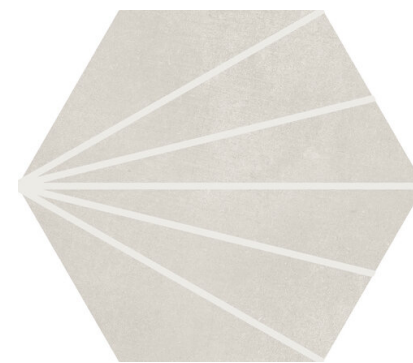

SUNNY PEARL 23X26

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037109	23X26	8,60	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	0.00

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	0.74



KLEN GREY 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A036859	60X60	9,50	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES


Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
----------------------	----------------	---------

SERENISSIMA GREY RECT 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A036861	60X60	9,50	PC BIA GL

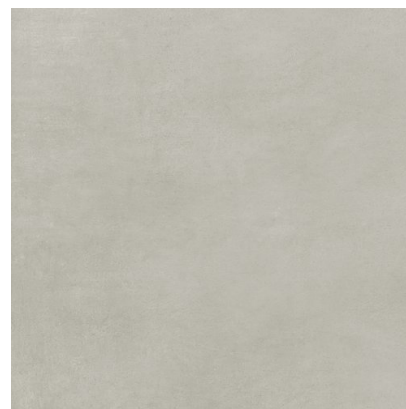

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
----------------------	----------------	---------

ROD. KLEN GREY 7,5X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP	
A037393	7,5x60	8,80	PC BIA GL	

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	0.00
---	--------------	------

PHYSICAL PROPERTIES

Thermal shock resistance	EN ISO 10545-09	0.00
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Stains resistance	EN ISO 10545-14	0.00
-------------------	-----------------	------

KLEN GREY 25X75

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A036842	25X75	8,70	REVESTI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=>12 N/mm ²
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	Not pass the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

GAMY GREY 25X75

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A036848	25X75	9,60	REVESTI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES


Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=>12 N/mm ²
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	Not pass the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

MACBA GREY 23X26

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037100	23X26	8,50	PC BIB

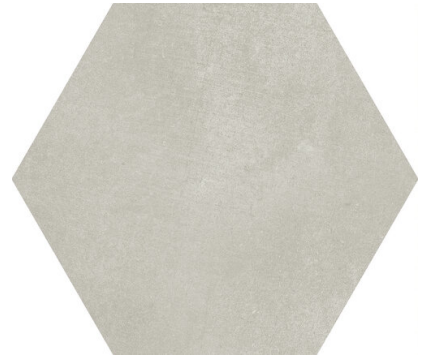

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0,5% < E < 3%
Flexion resistance	EN ISO 10545-04	=> 30 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	0.00

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS


Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (DCOF)	ANSI A326.3	0.74

CARMEN

true tiles

SUNNY GREY 23X26

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037108	23X26	8,50	PC BIB

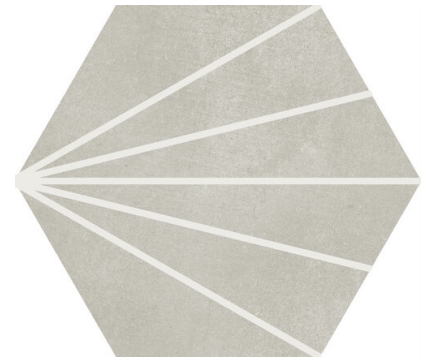

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0,5% < E < 3%
Flexion resistance	EN ISO 10545-04	=> 30 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	0.00

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	0.74

KLEN BLUE 25X75

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A036845	25X75	8,90	REVESTI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=>12 N/mm ²
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	Not pass the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

GAMY BLUE 25X75

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A036851	25X75	9,10	REVESTI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES


Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=>12 N/mm ²
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	Not pass the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

MACBA BLUE 23X26

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037099	23X26	8,60	PC BIB

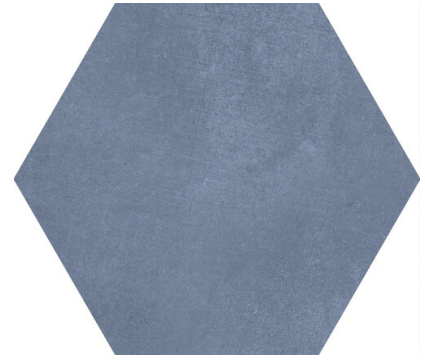

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES


Water absorption capacity	EN ISO 10545-03	0,5% < E < 3%
Flexion resistance	EN ISO 10545-04	=> 30 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	II
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	0.00

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (DCOF)	ANSI A326.3	0.74

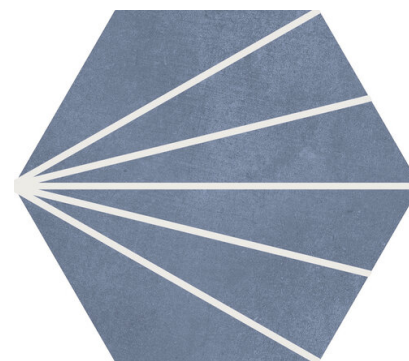

SUNNY BLUE 23X26

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037107	23X26	8,70	PC BIB

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0,5% < E < 3%
Flexion resistance	EN ISO 10545-04	=> 30 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	II
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	0.00

CHEMICAL PROPERTIES


Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	0.74

KLEN TERRACOTA 25X75

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A036844	25X75	9,30	REVESTI

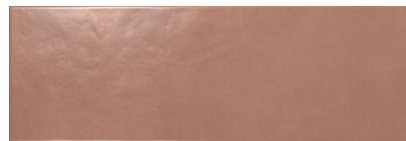

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=>12 N/mm ²
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	Not pass the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

GAMY TERRACOTA 25X75

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A036850	25X75	9,60	REVESTI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES


Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=>12 N/mm ²
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	Not pass the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

MACBA TERRACOTA 23X26

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037096	23X26	8,60	PC BIB

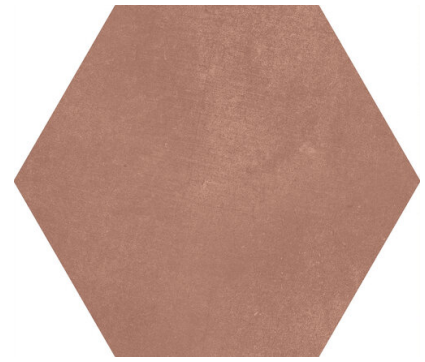

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0,5% < E < 3%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	II
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	0.00

CHEMICAL PROPERTIES


Resistance to acids	EN ISO 10545-13	GLA
Resistance to alkalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (DCOF)	ANSI A326.3	0.74

SUNNY TERRACOTA 23X26

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037104	23X26	8,60	PC BIB

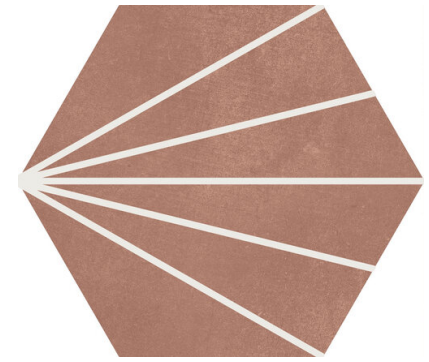

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0,5% < E < 3%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	II
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	0.00

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	0.74

KLEN PALLADIUM 25X75

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A036843	25X75	9,00	REVESTI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=>12 N/mm ²
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	Not pass the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

GAMY PALLADIUM 25X75

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A036849	25X75	9,60	REVESTI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES


Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=>12 N/mm ²
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	Not pass the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

MACBA PALLADIUM 23X26

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037098	23X26	8,50	PC BIB

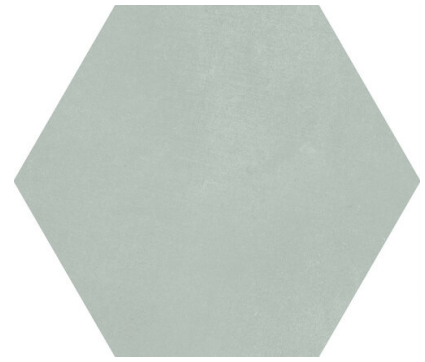

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES


Water absorption capacity	EN ISO 10545-03	0,5% < E < 3%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	0.00

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alkalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (DCOF)	ANSI A326.3	0.74

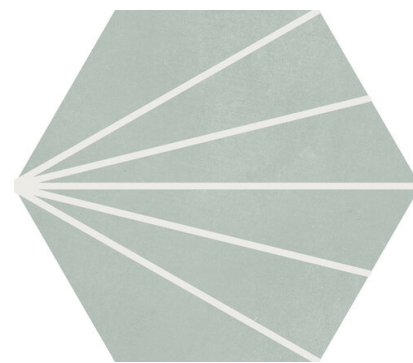

SUNNY PALLADIUM 23X26

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037106	23X26	8,30	PC BIB

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0,5% < E < 3%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	0.00

CHEMICAL PROPERTIES


Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	0.74

MACBA OBSIDIANA 23X26

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037095	23X26	8,30	PC BIB

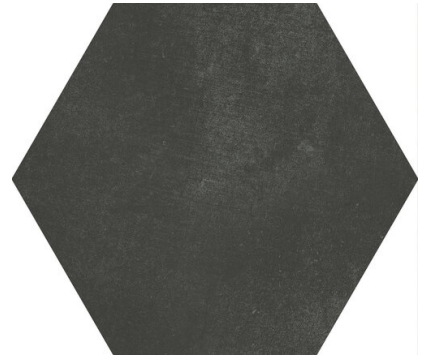

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0,5% < E < 3%
Flexion resistance	EN ISO 10545-04	=> 30 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	II
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	0.00

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS


Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (DCOF)	ANSI A326.3	0.74

CARMEN

true tiles

SUNNY OBSIDIANA 23X26

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037103	23X26	8,50	PC BIA GL

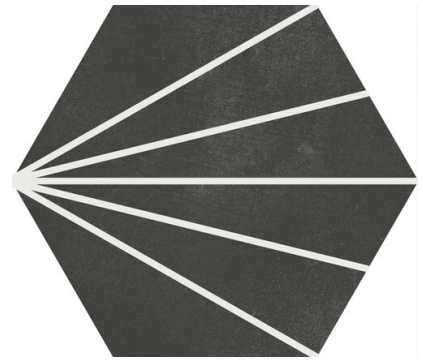

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 30 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	II
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	0.00

CHEMICAL PROPERTIES


Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	0.74

MACBA ROSE QUARTZ 23X26

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037094	23X26	8,70	PC BIB

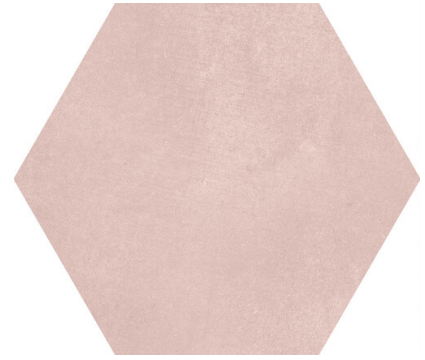

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0,5% < E < 3%
Flexion resistance	EN ISO 10545-04	=> 30 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	0.00

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS


Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (DCOF)	ANSI A326.3	0.74

CARMEN

true tiles

SUNNY ROSE QUARTZ 23X26

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037102	23X26	8,70	PC BIA GL

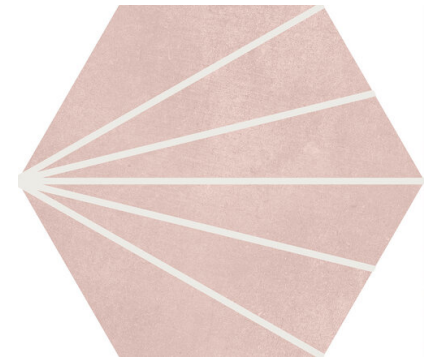

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 30 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	0.00

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	0.74