


## LOFT SOL 10X30

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP   |
|----------------|-----------|----------------|---------|
| <b>A016091</b> | 10X30     | 8,00           | REVESTI |

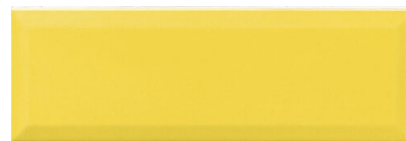

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                           |                 |                         |
|---------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | >10%                    |
| Flexion resistance        | EN ISO 10545-04 | => 23 N/mm <sup>2</sup> |
| Thermal shock resistance  | EN ISO 10545-09 | It stands the test      |
| Cracking resistance       | EN ISO 10545-11 | It stands the test      |
| Frost resistance          | EN ISO 10545-12 | Not pass the test       |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLA |
| Resistance to alcalis                                  | EN ISO 10545-13 | GLA |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |