


THINK WHITE RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040327	60x120	8,90	PC BIA GL

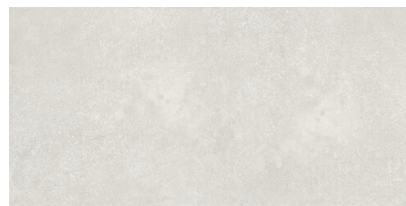

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
-------------------------------------------------------------	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP THINK WHITE RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040331	60x120	8,90	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
-------------------------------------------------------------	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alkalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GHB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GHB
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11



THINK WHITE RECT 100X100

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A041108	100X100	9,90	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
-------------------------------------------------------------	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP THINK WHITE RECT 100X100

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A041720	100X100	9,70	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------


CHEMICAL PROPERTIES

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11

HIGH THICKNESS THINK WHITE RECT 100X100

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A041112	100X100	19,40	PC BIA GL

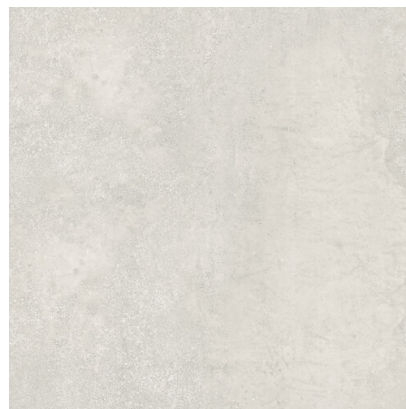

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11



THINK WHITE RECT 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040573	60X60	9,50	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
-------------------------------------------------------------	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP THINK WHITE RECT 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A041332	60X60	0,00	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
-------------------------------------------------------------	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES


Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GHB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GHB
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11

THINK WHITE RECT 30X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040582	30X60	8,30	PC BIA GL

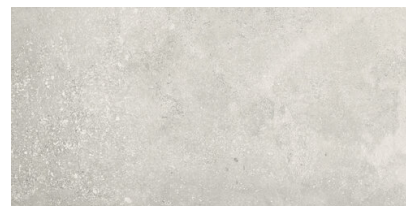

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
-------------------------------------------------------------	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	3



M-STICK THINK WHITE 30X30

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040339	30X30	9,20	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES



MOSAICO THINK WHITE 30X30 (5X5)

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040359	30X30	0,00	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES



MALLA THINK WHITE 29X27

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040355	29x27	0,00	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

PELDAÑO RECTO ANT. C3 THINK WHITE 33X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A041340	33x120	0,00	EXTRUSI



DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11

THINK GREY RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040329	60x120	8,90	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
-------------------------------------------------------------	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test


CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP THINK GREY RECT

60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040333	60x120	8,90	PC BIA GL

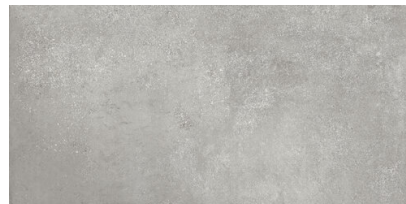

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
-------------------------------------------------------------	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GHB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GHB
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11



THINK GREY RECT 100X100

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A041109	100X100	10,00	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
-------------------------------------------------------------	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test


CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	3

HIGH THICKNESS THINK GREY

RECT 100X100

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A041113	100X100	19,40	PC BIA GL

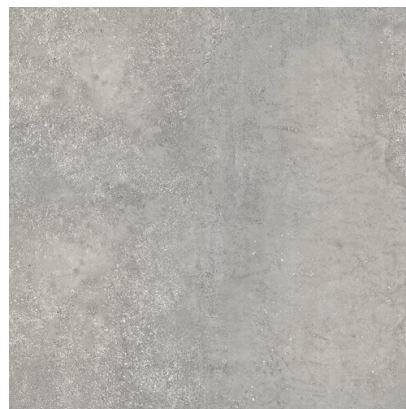

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11



THINK GREY RECT 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040575	60X60	8,90	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
-------------------------------------------------------------	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	3

THINK GREY RECT 30X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040584	30X60	8,30	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES


Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
-------------------------------------------------------------	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	3

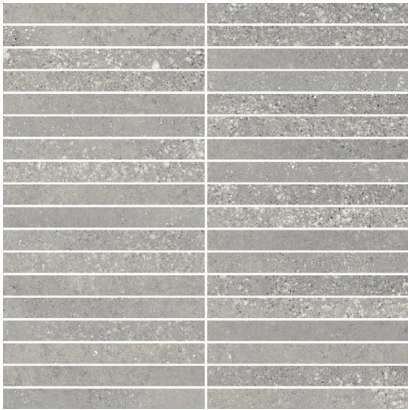

M-STICK THINK GREY 30X30

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040341	30X30	9,20	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES



MOSAICO THINK GREY 30X30 (5X5)

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040361	30X30	0,00	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES



MALLA THINK GREY 29X27

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040357	29x27	9,50	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

PELDAÑO RECTO ANT. C3 THINK GREY 33X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A041338	33x120	0,00	EXTRUSI



DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------


CHEMICAL PROPERTIES

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11

THINK COAL RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040330	60x120	8,90	PC BIA GL

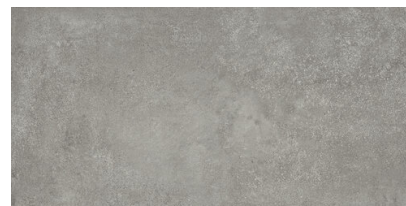

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
-------------------------------------------------------------	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP THINK COAL RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040334	60x120	8,90	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
-------------------------------------------------------------	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GHB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GHB
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11



THINK COAL RECT 100X100

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A041110	100X100	10,00	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
-------------------------------------------------------------	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	3

HIGH THICKNESS THINK COAL

RECT 100X100

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A041114	100X100	19,80	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11



THINK COAL RECT 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040576	60X60	8,70	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
-------------------------------------------------------------	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	3

THINK COAL RECT 30X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040585	30X60	8,30	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
-------------------------------------------------------------	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	3



M-STICK THINK COAL 30X30

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040342	30X30	9,20	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES



MOSAICO THINK COAL 30X30 (5X5)


REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040362	30X30	0,00	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

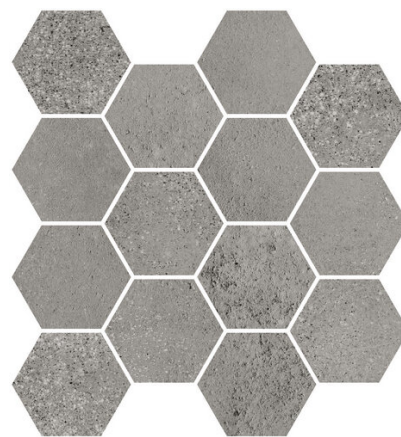

MALLA THINK COAL 29X27

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040358	29x27	0,00	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

THINK TAUPE RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040328	60x120	8,90	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
-------------------------------------------------------------	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP THINK TAUPE RECT

60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040332	60x120	8,90	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
-------------------------------------------------------------	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alkalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GHB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GHB
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11



THINK TAUPE RECT 100X100

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A041111	100X100	10,00	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
-------------------------------------------------------------	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP THINK TAUPE RECT 100X100

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A041721	100X100	9,70	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11

HIGH THICKNESS THINK TAUPE

RECT 100X100

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A041115	100X100	19,40	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11



THINK TAUPE RECT 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040574	60X60	9,00	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
-------------------------------------------------------------	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP THINK TAUPE RECT

60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A041334	60X60	8,80	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
-------------------------------------------------------------	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alkalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GHB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GHB
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11

THINK TAUPE RECT 30X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040583	30X60	8,70	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES


Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
-------------------------------------------------------------	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	3

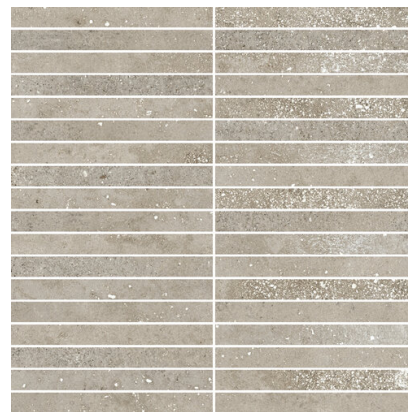

M-STICK THINK TAUPE 30X30

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040340	30X30	9,20	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES



MOSAICO THINK TAUPE 30X30 (5X5)

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040360	30X30	0,00	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES



MALLA THINK TAUPE 29X27

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040356	29x27	0,00	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

PELDAÑO RECTO ANT. C3 THINK TAUPE 33X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A041339	33x120	0,00	EXTRUSI



DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11